

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER
THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

[WIPO]

[Bar Code]

(43) International Publication Date
October 6, 2005 (10/06/2005)


PCT

(10) International Publication Number
WO 2005/093164 A1

- (51) International Patent Classification⁷: **E02D 3/074** (74) Representative: **BARTELS UND PARTNER**; Lange Strasse 51, 70174 Stuttgart (DE).
- (21) International Application No.: PCT/EP2005/002456 (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: March 9, 2005 (03/09/2005)
- (25) Language in which the international application was originally filed: German
- (26) Language in which the international application is published: German
- (30) Priority Data:
10 2004 014 375.7 March 17, 2004 (03/17/2004) DE (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TY, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European Patent (AT, BE, GB, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, HU, IE, IT, LU, MC, NL, PL,
- (71) Applicant (*for all designated states except the U.S.*): **HYDAC SYSTEM GMBH** [DE/DE]; Industriegebiet, 66280 Sulzbach/Saar (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (*U.S. only*): **KRICK, Martin** [DE/DE]; Parallelstrasse 16, 66538 Neunkirchen (DE).

[continued on next page]

(54) Title: DEVICE FOR CONTROLLING AND ACTUATING A VIBRATING MECHANISM

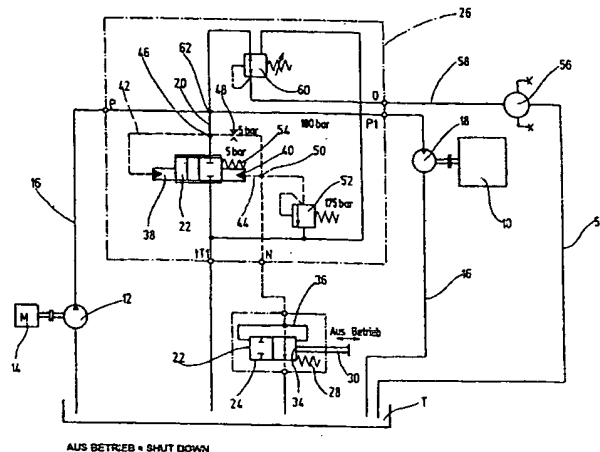

(57) Abstract: The device for controlling and actuating a vibrating mechanism, particularly in tampers, comprises a hydraulic pump (12) that drives a hydraulic motor (18), which interacts with the vibrating mechanism (10) while being a part of a hydraulic circuit (16) to which a pressure regulator (22) is connected in the secondary branch (20) and can be controlled by a hydraulic switching device (24). This configuration provides a purely hydraulic solution that does not require electrical current for controlling and switching off the vibrating mechanism.

[Fortsetzung auf der nächsten Seite]

WO 2005/093164 A1

RECEIVED
WIPO
COPY

WO 2005/093164 A1

[Bar Code]

PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Reference is made for an explanation of the two-letter codes and the other abbreviations to the Guidance Notes on Codes and Abbreviations in the front section of each regular PCT Gazette edition.

Published:

— *With International Search Report.*

2005/093164 A1